


UNITED STATES OF AMERICA

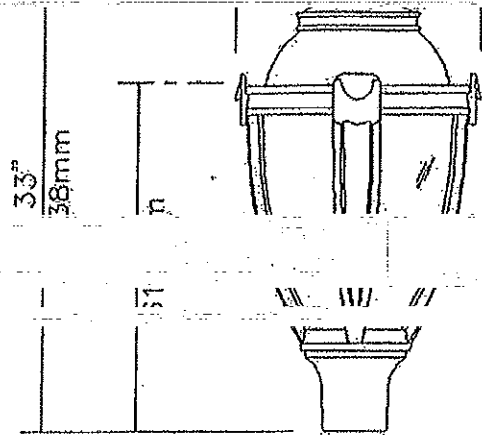

ENREGISTRÉ

REGISTERED

Description of Components:

Finial: Decorative cast 356 aluminum, mechanically assembled.

Hood: Cast 356 aluminum dome, mechanically assembled on the luminaire.

Guard: In a recessed groove with 4 set screws. Fits over the lens and is cast 356 aluminum, mechanically assembled to the luminaire.

Globe: Made of one-piece seamless inflated-molded extra clear polycarbonate. The globe is assembled on the access mechanism.

Optical System (OS): I.E.S. type III (asymmetrical) cutoff optical system. Multi-faceted hydroformed aluminum reflector brightened and anodized, mechanically assembled on the luminaire.

Ballast: High power factor of 99%, dimmer voltage 120/209/240/277 volts, connected to 277 volts, 1 amp starting capability, 20 (300) degrees. Assembled on a drilled removable tray with quick disconnect plug.


Fitter: Cast 356 aluminum c/w 4 set screws 3/8-16 UNC. Slip-fits on a 4" (102mm) outside diameter x 4" (102mm) long tenon.

Base & Bolt Information	Anchor Plate	Free opening
640; Curé-Bolvin	B.C.: 12 1/2" 318mm	8 1/4" 210mm

Comes with 4 steel anchor bolts, 3/4"
 1 1/2" long, 8 nuts and 8 washers.
 Important: Do not obstruct space





#1 (40mm) round extruded 6061-T6 aluminum
 tubing, having a size 1/2" wall
 This glass round joint cover made from cast 356 aluminum,
 mechanically fastened with stainless steel screws.




copper ground lug.
 Base Cover: Two piece round base cover made from cast 356 aluminum,
 mechanically fastened with stainless steel screws.

Pole Options: (FS1), Single tuse and tuse holder, single tuse and tuse holder



Description of Components:



1/4" TEM wire 6" (152mm) minimum exceeding from luminaire.
 All seals and sealing devices